



Representation in Singapore:



TSH Gas

陈顺和煤气供应商私人有限公司  
TAN SOON HUAH GAS SUPPLY PTE LTD  
15 Defu Lane 11, S(539171)  
Email: sales@tshgas.com.sg Website: www.tshgas.com.sg

up to 40 kg/h

single phase

220 - 240 V A.C. / 50 - 60 Hz

Dry-type Vaporizer  
FAS 2000





# FAS 2000•40

## Dry-type Vaporizer - Capacity up to 40 kg/h

The vaporizer unit FAS 2000-40 was constructed for a stable LPG supply in independent gas supply systems with low capacities.

### Characteristics:


- Independency of gas mixture (propane, butane or propane-butane-mixture)
- 2-stage-safety system (2 solenoid valves in vaporizer inlet)
- Connection pipe screwing 12 mm / 15 mm according to customer request
- Plug-in version ready for connection
- Suitable for installation in hazardous areas of zone 2
- Ignition protection type CE Ex II 3G Ex nR II T4

### Technical Data:

Manufacturer	FAS Germany
Type	Dry-type vaporizer
Capacity	up to 40 kg/h
Gas temperature outlet	max. 70° C
Max. pressure	25 bar
Connection of version 40 kg/h	220 - 240 V, 50/60 Hz, 1 phase
Max. current consumption with 240 V	20A

### Operation parameters:

Diameter of pipe	12 mm / 15 mm according to customer request
Cable cross section not less than	2,5 mm <sup>2</sup> with supply pipe length of max. 20 m
Dimensions / Weight	518 x 163 x 355 mm, 32,7 kg
Warranty	12 months

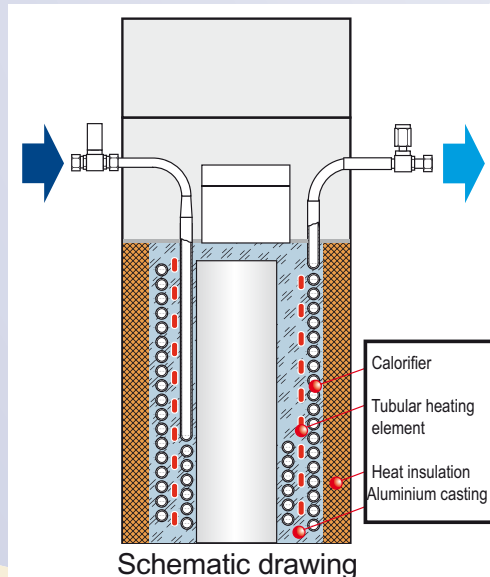

Schematic drawing